




MOUNTING POSTS

ACCESS CONTROL



water resistant
all styles have a baked on, crinkle coat enamel finish that repels water



large or small
mounting of any size keypad or telephone intercom system



pad mount
suitable for securing to concrete or asphalt



in-ground mount
with cement for additional support

- Pad mounting bolts directly onto existing concrete
- Post mounting can be recessed directly into ground and used with concrete reinforcement
- Standard style will mount anything from a single keypad to a full telephone access system
- The Dual Mount system is ideal for applications where delivery trucks as well as standard automobiles are present
- Baked on crinkle coat enamel finish is durable and weather resistant

FEATURES


ACCESS CONTROL SOLUTIONS





MOUNTING POSTS

The Architectural and Standard style mounting posts are available in either pad mount or in-ground mounting configuration. Pad mount posts include a base plate and base plate cover. In-ground mounting posts have approximately 22-inches of length added to the mounting posts for in-ground mounting. The dual mount post is available in pad mount configuration only.

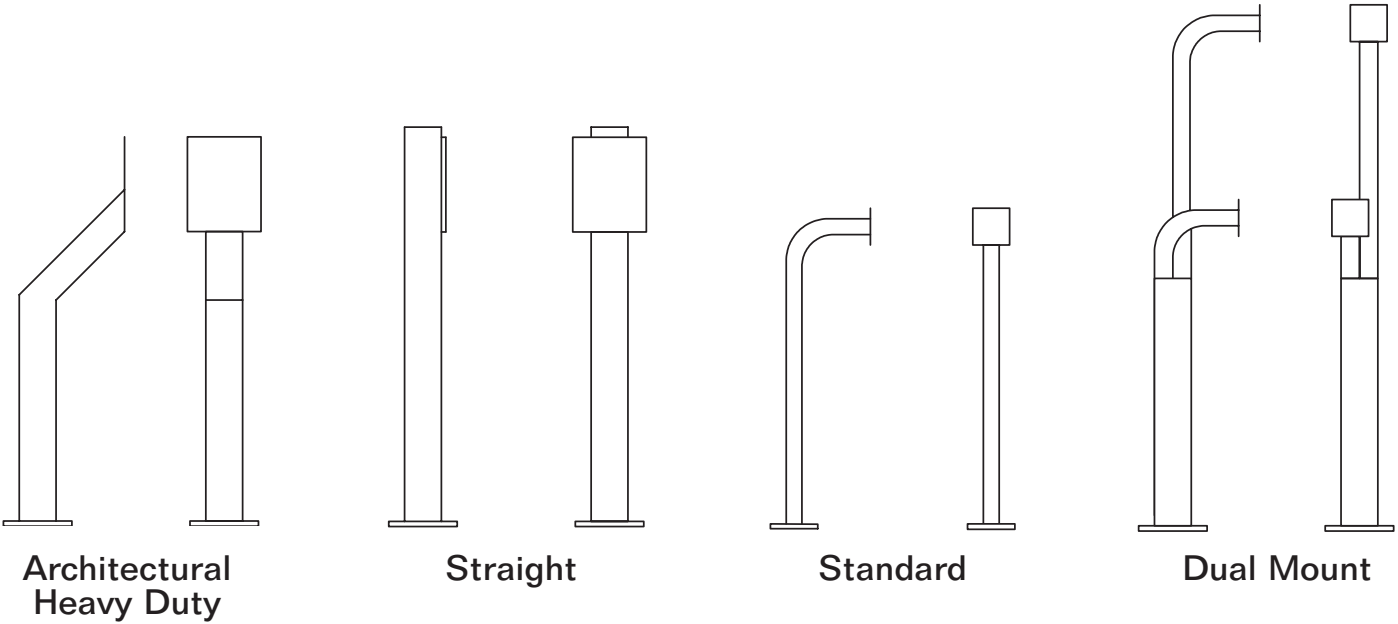

Mounting Posts

Architectural Heavy Duty Style

- Ideal for surface mount phone units
- Constructed from 4x4 steel stock
- Baked on, crinkle coat enamel finish that repels water

1200-037 Pad Mount

Short Gooseneck. 42 inches tall to bottom mounting plate. Includes base plate and base plate cover for pad mounting. Angles out 14 inches.

1200-038 In-ground Mount

Long Gooseneck. 64 inches long, no mounting plate. Angles out 12 inches.

Straight Style

- Constructed from 4x4 steel stock
- Baked on, crinkle coat enamel finish that repels water

1200-150 Pad Mount

Short Gooseneck. 44 inches tall to bottom mounting plate. Includes base plate and base plate cover for pad mounting.

1200-151 In-ground Mount

Long Gooseneck. 81 inches long, no mounting plate.

Standard Style

- Ideal for mounting keypads and card readers
- Constructed from 2x2 steel stock
- Sweeps out approximately 12-inches
- Baked on, crinkle coat enamel finish that repels water

1200-045 Pad Mount

Short Gooseneck. 42 inches tall with base plate and base plate cover for pad mounting.

1200-046 In-ground mount.

Long Gooseneck. 64 inches long, no mounting plate.

Dual Mount Style

- Use at entrances where both truck and automobile traffic are present
- Base post is constructed from 2x4 steel stock
- Sweeps are constructed from 2x2 steel stock and sweep out approximately 12-inches
- 42-inches tall to bottom of lower mounting plate
- 72-inches tall to bottom of upper mounting plate
- Pad mount only, mounting plate and cover included
- Baked on, crinkle coat enamel finish that repels water

1200-049

Dual Gooseneck

Shipping Weight

1200-037 40 lbs (18.1 kg)
1200-038 55 lbs (24.9 kg)

Warranty

1 year warranty

Shipping Weight

1200-150 40 lbs (18.1 kg)
1200-151 55 lbs (24.9 kg)

Warranty

1 year warranty

Shipping Weight

1200-045 23 lbs (10.4 kg)
1200-046 25 lbs (11.3 kg)

Warranty

1 year warranty

Shipping Weight

1200-049 48 lbs (21.7 kg)

Warranty

1 year warranty

Distributed by:

DOORKING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2007 All Rights Reserved. Product specifications may change without notice. Rev. 3/07

MEMBER:

